

## **BREOX CL 1300**

During the production of low-density polyethylene, the ethylene gas feedstock is compressed at pressures up to 3500 bar. The final stage compression is carried out in high speed reciprocating compressors known as hyper-compressors. A number of different lubricants have been used as lubricants for hyper-compressors. However, for the reasons described below, polyalkylene glycols are generally the most cost effective.

1. Polyalkylene glycols are much less soluble in ethylene than are white oils or polyisobutylenes. Therefore a two fold advantage is observed:
  - a. viscosity reduction due to ethylene dissolving in the lubricant is minimised.
  - b. lubricant is much less likely to be removed, or washed, from the plunger running zone.

Thus overall lubricant consumption and compressor maintenance requirements are reduced. The consumption of polyalkylene glycol is usually less than half the corresponding consumption of white oil or polyisobutylenes in the same conditions.

2. Polyalkylene glycols have superior load carrying and lubricant performance compared to white oils and polyisobutylenes, thus minimising wear on plungers and packings. Typical life time figures for packings reported by end-users are in the range of 20,000 – 40,000 hours.
3. Polyalkylene glycols have relatively flat pressure-viscosity characteristics compared to white oil, polyisobutylenes and mixtures thereof. This means that they flow more readily in the high pressure lubricant lines of the compressor and are much less likely to solidify in the lines at lower temperatures – see figures 1, 2, 3.

For these reasons, polyalkylene glycol based ethylene compressor lubricants offer the best possible lubricant performance with outstanding economy.

**BREOX CL1300** may be preferred for use in regions that experience low winter temperatures and is thus a seasonal product. The combination of low pour point and flat viscosity-pressure characteristics means this product remains mobile under severe winter conditions.

## **Typical Properties**

	<b>Breox CL 1300</b>
Specific gravity 20:20 °C	1.056
Viscosity 40 °C, cSt	250
Viscosity index	240
Flash point COC °C (ASTM D92)	285
Pour point °C (ASTM D97)	-32

**BREOX** Compressor Lube CL 1300 is a stable, non-corrosive, high flash-point liquid, which can be stored in mild steel tanks under air or nitrogen. However, the product can absorb moisture, and appropriate measures to avoid this should be observed.

## **Comparison with Polyisobutylene / white oil blends**

This lubricant is widely used, and generally preferred to lubricants containing either of the single components. Typically, it must be heated to 40 °C before entering the cylinder, otherwise problems can be encountered since the lubricant may pose too high a viscosity. The consumptions of PIB/White oils lubricants are typically substantially higher than with PAG type lubricant, and the packing life significantly lower. Problems can also be encountered with interaction with the additives in the PIB / white oil lubricants. The carry over of small quantities of PAG lubricants also appears to have a positive benefit on film strength, compared to where PIB / white oil has been used, during the manufacture of polyethylene film.

In favour of the PIB / white oil is its lower unit cost, though this is more than off set by higher consumption compared with PAG. Additionally, PIB / white oil should be used for polyethylene which is to be used for high tension cable grades, as it has less effect on the dielectric constant of polyethylene. In most cases, therefore, polyalkylene glycols are considered the lubricant of choice.

Figure 1 Viscosity and temperature curves for polyethylene compressor lubes

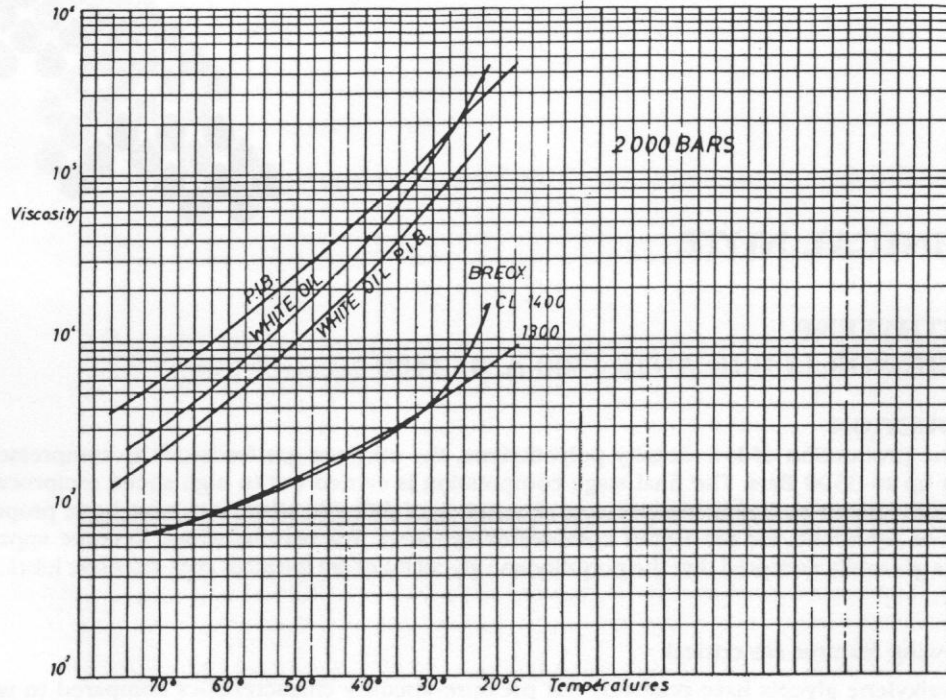


Figure 2 Viscosity and pressure curves for polyethylene compressor lubes


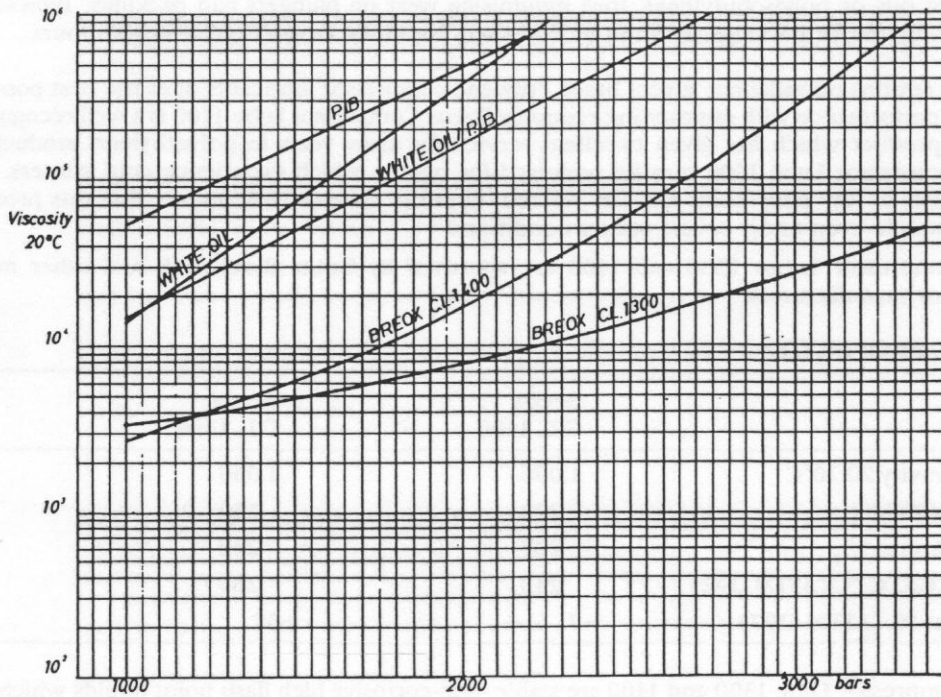


Figure 3 Viscosity and pressure curves for polyethylene compressor lubes

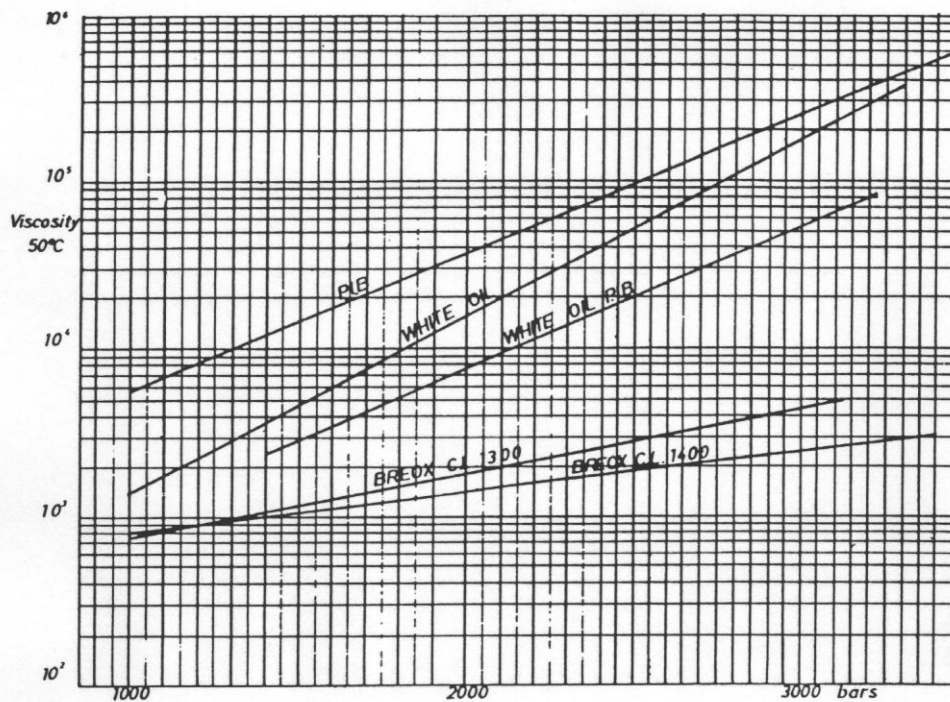

## **FDA Compliance**

BREOX CL grades are composed exclusively of regulated food additives intended for use in a lubricant with incidental food contact, and are in compliance with the food additive provisions of the Federal Food, Drug and Cosmetic Act, citation 21 CFR 178.3570. As such the BREOX CL grades are NSF registered as FDA compliant products (former USDA H1 regulations).

## **Remarks**

### **Handling & Safety:**

Material Safety Data sheets have been issued describing the health, safety and environmental characteristics of these products together with advice on handling precautions and emergency procedures. These must be consulted and fully understood before handling, storage and use.

### **Storage:**

## **Revision-No.**

2.2-08.2004 Effective August 17, 2004

The product can be stored for at least 2 years at ambient storage conditions and temperature without any deterioration.

---

All products in the text marked with an © are trademarks of the Cognis group.

The information on product specifications provided herein is only binding to the extent confirmed by Cognis in a written Sales Agreement. COGNIS EXPRESSLY DISCLAIMS ANY RESPONSIBILITY FOR THE SUITABILITY OF THE PRODUCTS FOR ANY SPECIFIC OR PARTICULAR PURPOSES INTENDED BY THE USER. Suggestions for the use and application of the products and guide formulations are given for information purposes only and without commitment. Such suggestions do not release Cognis' customers from testing the products as to their suitability for the customer's intended processes and purposes. Cognis does not assume any liability or risk involved in the use of its products as the conditions of use are beyond its control. The user of the products is solely responsible for compliance with all laws and regulations applying to the use of the products, including intellectual property rights of third parties.

**Cognis Performance Chemicals UK Ltd - Charleston Industrial Estate,  
Hardley, Hythe, Southampton, SO45 3ZG, UK - Phone +44 (0) 2380 894666  
- Fax +44 (0) 2380 234113**

**F\_S**

